



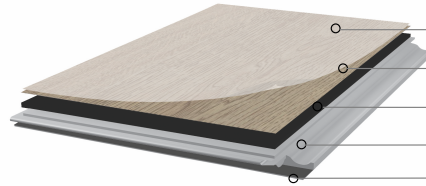

SPC+ RIGID CLICK PLUS
water proof flooring



- Embossed Wearlayer with PU finishing
- Design Film
- Comfort layer
- 100% Waterproof Solid Board
- Comfort & Acoustic IXPE underlay

Superior comfort for wet areas.
Perfect for large areas up to 400m²,
no joints required.

TEST	TEST METHOD
Dimensions / Thickness	EN 427 / EN 428
Emboss / Surface	
Impact Sound Reduction	EN 140
Classification	EN 16511
Weight	EN 430
Fire Performance	EN 13501
Anti-Sliding Properties	EN 13893
Dimensional Stability After Exposure to Heat	EN ISO 23999:2018/08
Static Indentation	EN ISO 24343
Chemical Resistance	EN 423
Anti-static Resistance	EM 1815
Determination of the Effect of a Castor Chair	EN 425:2022-04
Microscratch Resistance	EN 16094
Resistance Against Staining	EN 438-2:2016
Locking strenght - short side joints - long side joints	En ISO 10582:2018-01, Annex D
Underfloor Heating	
Thermal Resistance	EN 12667:2001-01
French VOC Regulation	
Peel Resistance	EN 1464:2010-02
Resistance to Fading	ISO 105 B02

LUNGO COLLECTION
1805 x 225 x 6,2 mm (including 1mm IXPE underlay)
Registered Wood / Regular Wood Semi-matte
19 dB
33
11,63 kg/m ²
Bfl - s1
Class DS
-0,05 length / 0,00 width
0,00 mm
Class 0 - Good
< 2kV
No visible change after 10.000 cycles
MSR-B1
*Group 1, 2 and 3: grade 5
4.6 kN/m 5.5 kN/m
Approved 27°C
0,010 (m ² K)/W
A+
2,11N/mm
6/8 depending on design

Registered Wood: products 9550 and 9551 / Regular Wood: products 9701, 9736 and 9737

